



LG VX6000 Body Replacement

Written By: Barrett Wallace



INTRODUCTION

This guide is for dismantling the body of the LG VX6000, a step that is required for many other repairs



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery



- Push the dark gray tab towards the top of the phone to release the battery. The tab is located on the back of the phone.


Step 2



- Remove battery pack.
- ⓘ You will need to unhook the bottom of the battery pack from the slot.


Step 3 — Body



 Set the battery aside.

Step 4




- Pull the two rubber cushions out using tweezers.
-  Only remove the two cushions that are circled!

Step 5



- Unscrew the six screws seen on the back using a Phillips 00 Screwdriver.
- Remove screws carefully on an uncluttered surface. They are very small, and could get lost.

Step 6

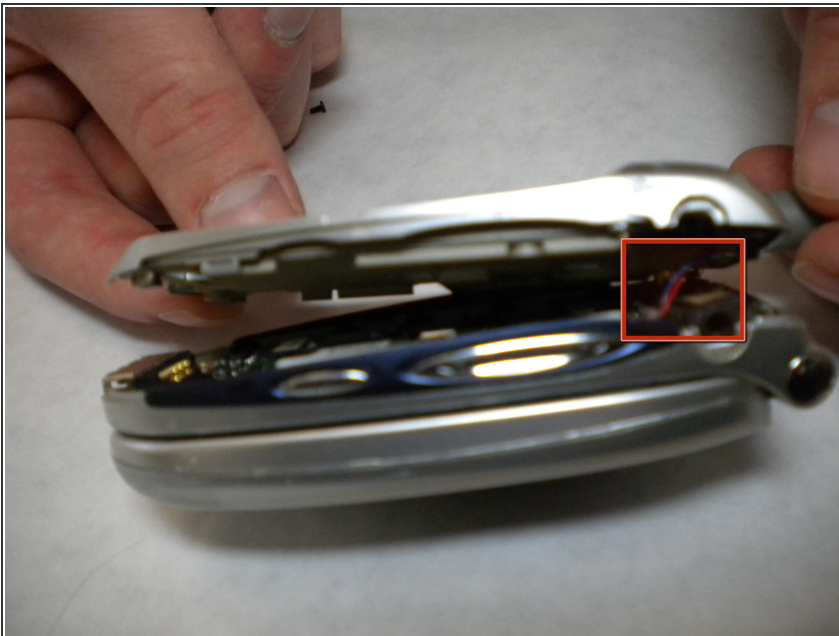

- Remove the back of the phone using your hands.
- ⚠ There is a pair of red and blue wires that plugs into the logic board. These wires will snap if you force the pieces apart.
- Remove the back of the phone very gently. Use your fingernail or tweezers to unplug the wires.
- To reattach the back, you must plug these wires back in.